



INSTALLATION 1

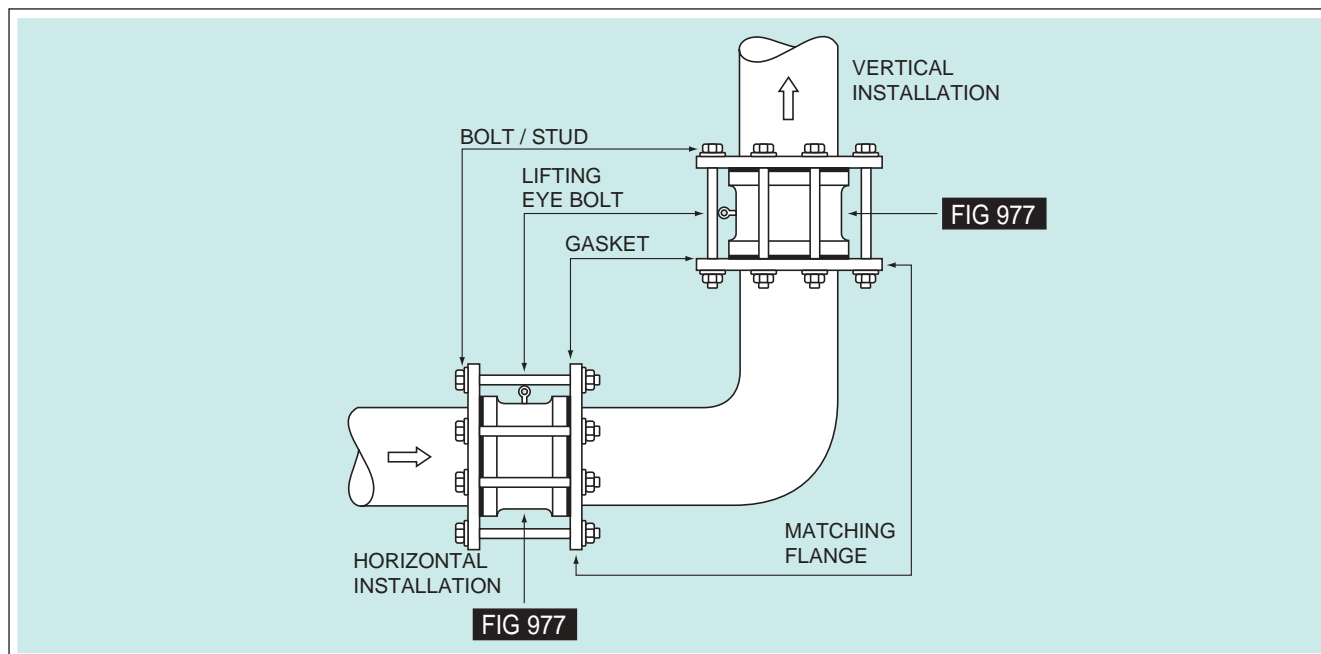

AFA dual flap wafer check valves need one sets of bolts (studs & nuts) to install it. These check valves installed in horizontal position must be installed with hinge pin in the vertical position to ensure proper operation. AFA check valves larger than 6" (DN150) are fitted with lifting eye bolts to provide easier handling and site safety.

INSTALLATION 2

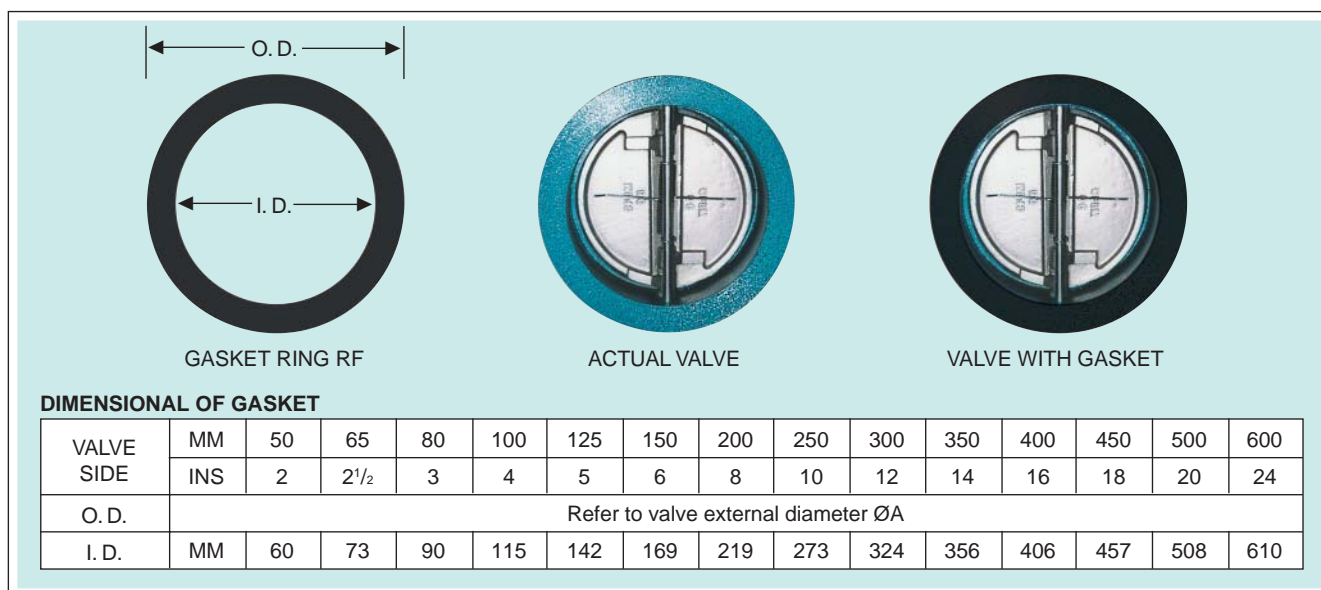

Use the correct dimension of gasket especially I.D. is important. The correct dimension of gasket (O.D. = valve external diameter ØA and I.D. = valve internal diameter ØB) provide a perfect opening of disc and prevents leakage as well.